

H.264 Megapixel IP Camera Quick User Guide

1. IP Camera Application Diagram



2. IP Camera Connectors

2.1 Power Input

Connection with power adapter, DC12V

2.2 RJ45 LAN port

10/100M adaptive RJ45 network cable interface, which could be connected to all network devices, such as switch, routers, etc.

Yellow: Power indicator; Normal: Lights all the time

Green: Network Signal; Normal: Blinking



3. IP Address Search

Factory default settings of the IP Camera:

IP address: 192.168.1.10

Subnet Mask: 255.255.255.0

Gateway: 192.168.1.1

User name: admin

Password: no password

Step1: Search IP Address

Step2: Modify IP address (make sure the IP camera and the computer in the same Network segment in one LAN)



4. IE Preview

4.1 Input IP address: 192.168.1.10

(Default) User name: admin


Password: (no password)

After login, you need install the player (ActiveX controller)

To display the camera image



4.2 After Login, select “ Connect all video(Main Stream)” or “ Connect all video(Extra Stream)”

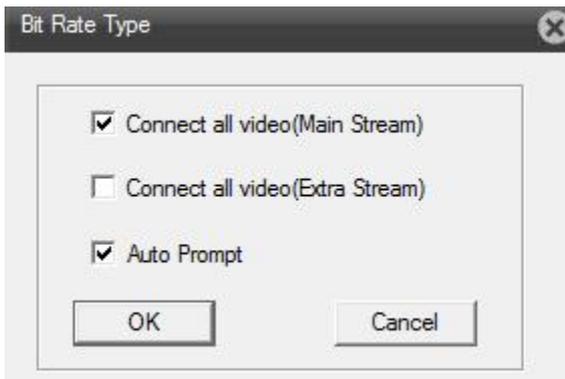

Then you will get the below image



5. CMS Preview

Install CMS, run it,
Default user name: super
Password: (no password)




5.1. Add IP camera


5.1.1 Click "System" button,

5.1.2 Click "Device Manager" button,

5.1.3 Click "ADD AREA" button, and Created Zone in the pop-up window as shown below: (For example Zone name is ABC)

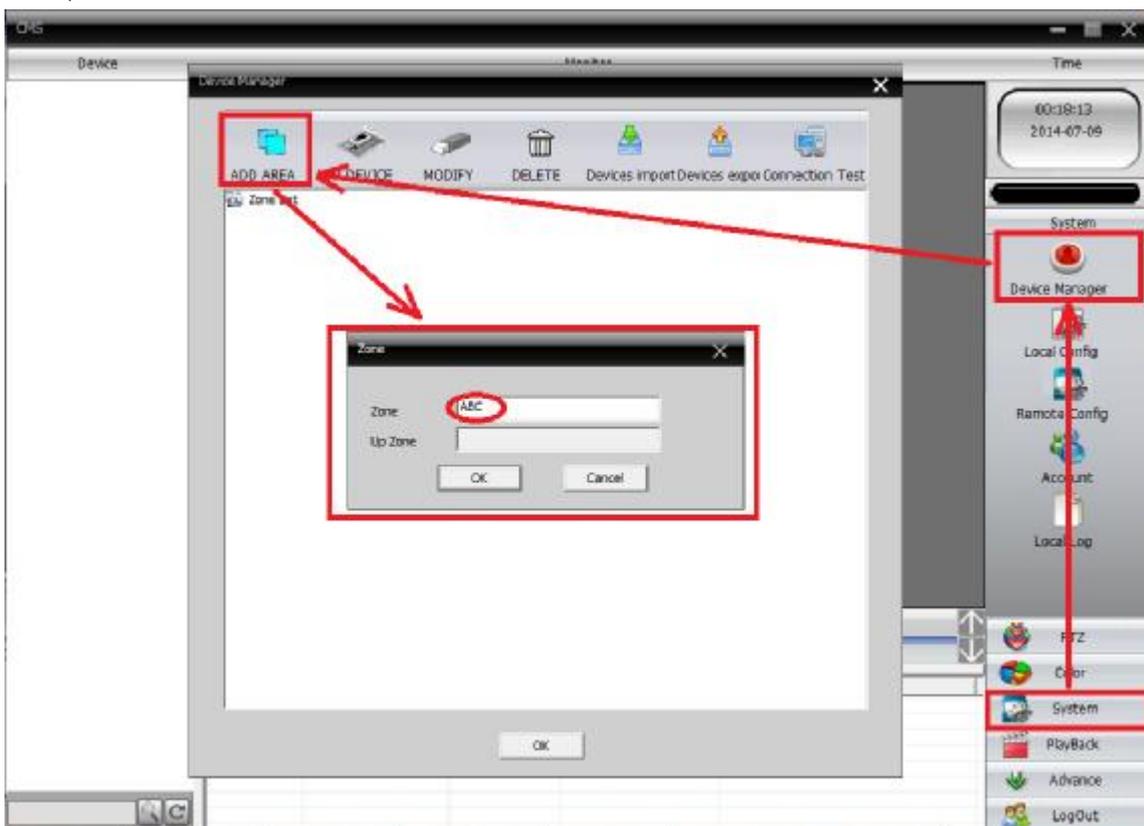

5.1.4 Select created Zone list "ABC", then click "ADD DEVICE" and click "IP Search" button in the pop-up window, then you will get the IP camera image as below:

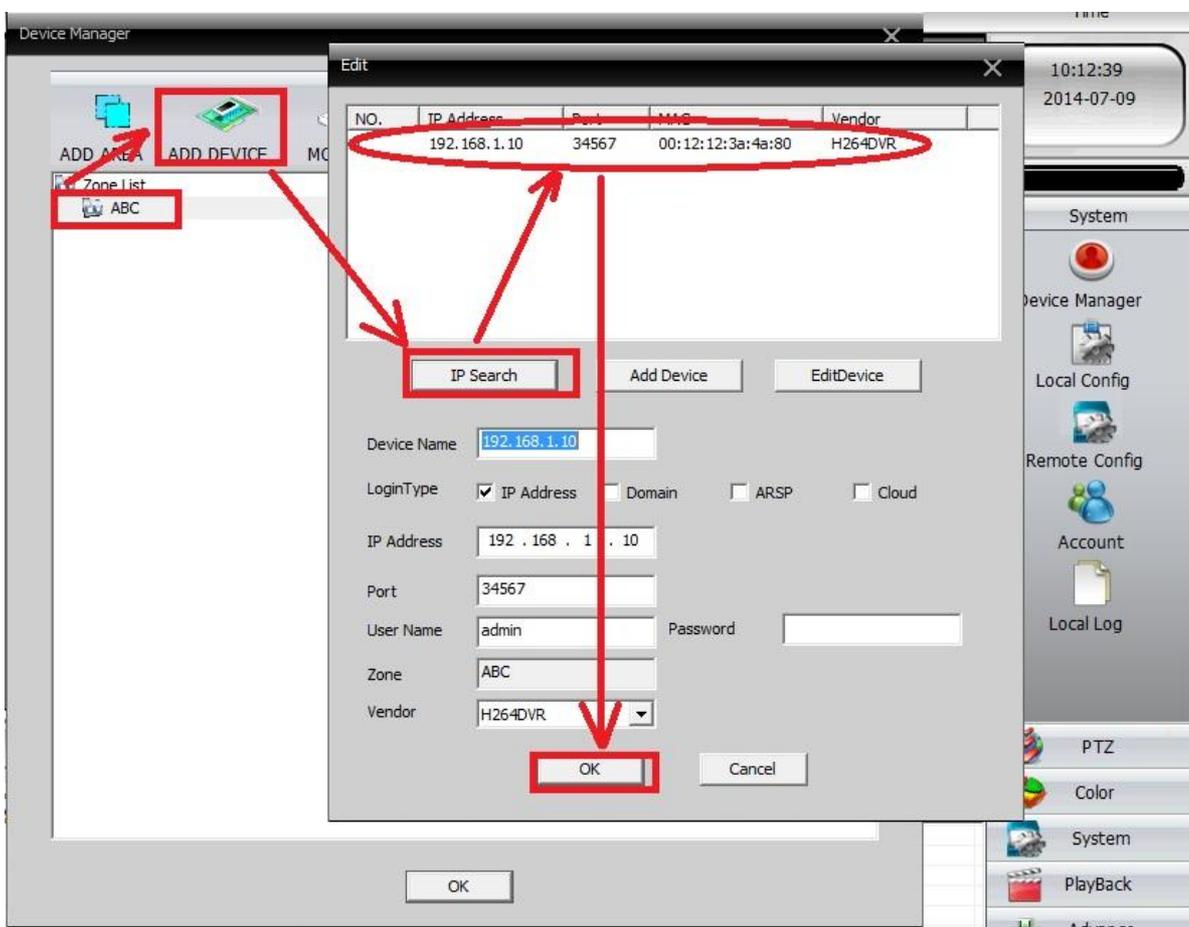

6. Mobile Preview

6.1 Mobile preview APP Name: vMEyeCloud Lite

Support iPhone /Android smart phone

6.2 "vMEyeCloud Lite" APP support p2p function and QR Code Scan

6.2.1 Download P2P APP from Apple or Android APP Store

6.2.2 Open "vMEyeCloud Lite" APP on your mobile

6.2.3 Select by "By Device"



Input the P2P UID code by below two ways:

6.2.3.1 Manually input the P2P UID


6.2.3.2 QR Code Scan

6.4 Input the User ID and password, and click "save", then you will get below image:



7. Cloud Preview

The cloud website is: <http://xmeye.net>, as shown below:

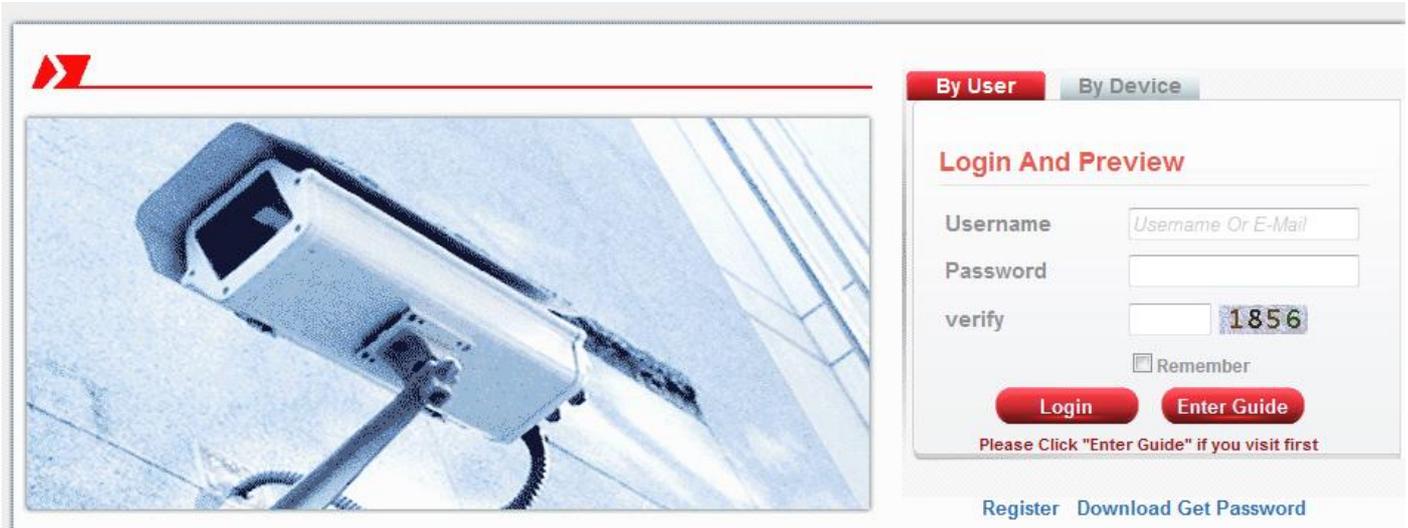

7.1 By user



The image shows a web interface for user login. At the top, there are two tabs: "By User" (selected) and "By Device". Below the tabs is a section titled "Login And Preview". It contains the following fields and elements:

- Username:** A text input field containing "HCIPC002".
- Password:** A password input field with masked characters "••••".
- verify:** A verification input field containing "1856", with a small image showing the number "1856" for reference.
- Remember:** A checkbox labeled "Remember" which is currently unchecked.
- Buttons:** Two red buttons labeled "Login" and "Enter Guide".
- Message:** A red text message below the buttons: "Please Click 'Enter Guide' if you visit first".
- Footer:** Three blue links: "Register", "Download", and "Get Password".

7.1.1 Click "Register" to register one account, input the info as shown below:

Username	<input type="text" value="HCIPC002"/>
True Name	<input type="text" value="HCIPC002"/>
Sex	<input type="text" value="Male"/> ▼
Contact	<input type="text" value="HCIPC002"/>
Address	<input type="text" value="China"/>
E-mail	<input type="text" value="IPC@gmail.com"/> (You can get your password back by the E-Mail)
Password	<input type="password" value="••••••"/>
Confirm	<input type="password" value="••••••"/>

7.1.2 Add IP camera under your account:

Select "Device Manage", click "add" button to add IP camera as below:

[My Devices](#) | [Device Manage](#) | [User Info](#) | [Logout](#)




The image shows a form for adding an IP camera. It is located within a page that has navigation links at the top: "My Devices", "Device Manage", "User Info", and "Logout". The form itself contains the following fields and elements:

- SerialNo:** A text input field containing "ee1b8e99538065c".
- Device Name:** A text input field containing "HCIPC".
- Username:** A text input field containing "admin", with a note "(default is 'admin')".
- Password:** A password input field, with a note "(default is null)".
- Buttons:** Two buttons labeled "Ok" and "Cancel" at the bottom of the form.


7.1.3 Preview IP Camera in Cloud website: click My Devices, Double click ,



Select "main Stream/Extra Stream"

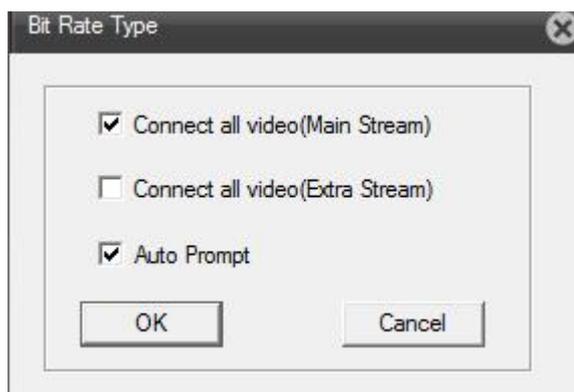

Then you will see the IP camera image as shown below:

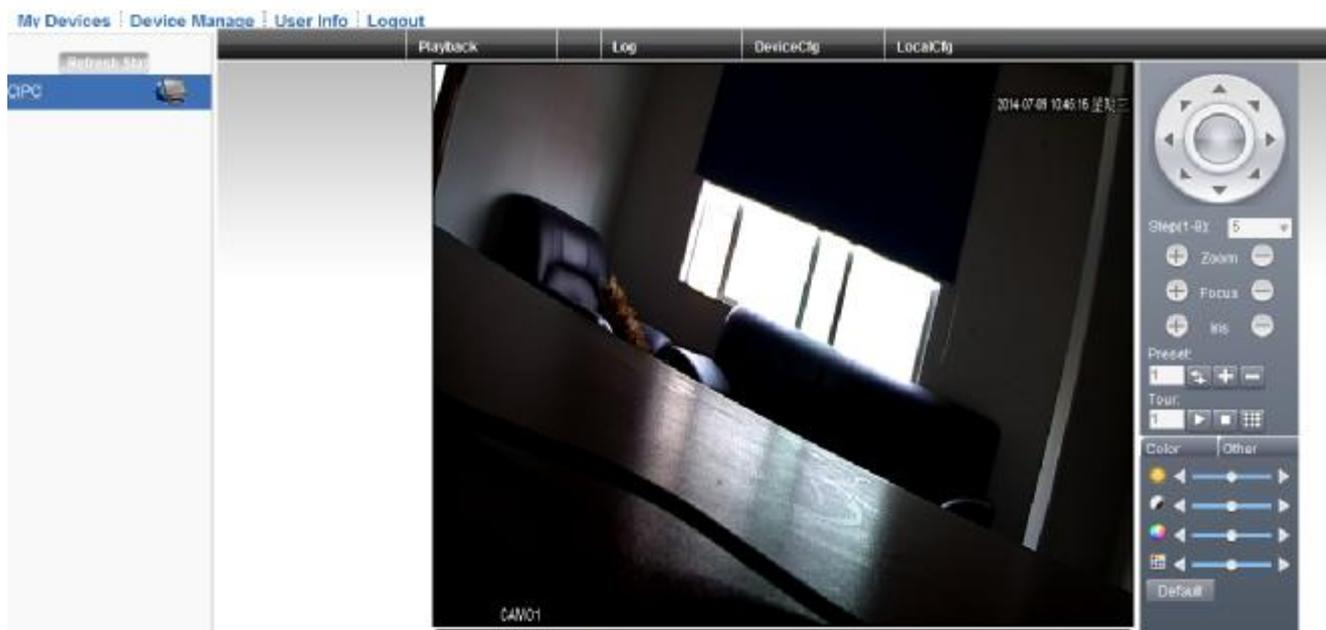

7.2 By Device

By User **By Device**

Login And Preview

id

verify 

Login **Enter Guide**

Please Click "Enter Guide" if you visit first

[Register](#) [Download](#) [Get Password](#)

Input the P2P ID and verify code, click "Login", Select "main Stream/Extra Stream"

Bit Rate Type

Connect all video(Main Stream)

Connect all video(Extra Stream)

Auto Prompt

Then you can get below image

