

## Brief Instructor of PC Client DeviceViewer

### 1. Install the PC client software “ DeviceViewer” to your PC.

You can get the “DeviceViewer” from the CD which attached with the camera in the gift box. After the PC client been installed, there will be a icon displayed on the desktop.



### 1. Add cameras to the DeviceViewer

1-1. Run the DeviceViewer, you will get bellow login interface: (Default user: admin, Password: admin)




1-2. After login the DeviceViewer. You need add the cameras to the DeviceViewer.

Move the Mouse to DeviceList, Right\_click your Mouse, you will see a dialog box, then choose “Search device”, Just do as bellow picture.



1-3. Click “Search” button. You can search out all the IP cameras in the LAN. Then choose the camera which you need add to the DeviceViewer.

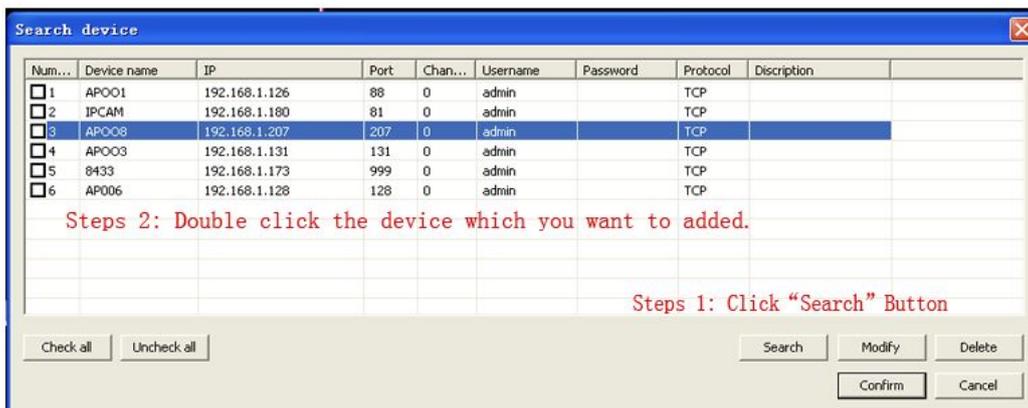

1-4: Steps1: Click “Search: Button, All the devices(Device and the PC Must in the same LAN) will be listed on the search device.

Steps2: Choose the Device which you need to added, Double click the device will show bellow “Modify device” window.

The screenshot shows the 'Modify device' window with the following fields and values:

Field	Value
Device	APO08
Video	H264
IP	192.168.1.207
Port	207
Username	admin
Address	IPV4
P2P ID	MEYE-001050-PNUJVV
Channels	1
Password	

1-5: How to setting the “Modify device”

1: Device: Change the name of the device.

2: Video: Include two mode.

One is H.264, One is Jpeg. So if the camera’s Compression is H.264, then you need choose H.264. If the camera’s compression is MJPEG, then you need choose Jpeg.

3: Address: Mode of how to access the camera.

IPV4: Access the camera via IP Address.

ULR: Access the camera via DDNS.(This function no use now)

P2P : Access the camera via P2P ID.( Default choose this mode)

4: P2P ID: Here you can input the device P2P ID.

5: Username: Username of the device.

6: Password: Input the Password of the device.

After you setting all the device information ok. Finally click “ Confirm ” Confirm.

For example:


The camera Device name: AP008, P2P ID: MEYE-001050-PNUVV

Video compression is MJPEG. Username is : admin Password is : 123456

The screenshot shows the 'Modify device' window with the following fields and values, where the fields are circled in red:

Field	Value
Device	AP008
Video	Jpeg
IP	192.168.1.207
Port	81
Username	admin
Address	P2P
P2P ID	MEYE-001050-PNUVV
Channels	1
Password	123456

1-6: After all the information of the camera is been setting OK, Click , then you will back to the Search Device window. First tick the device. Then click confirm. Then the device have been add to the DeviceViewer and you will find out one camera have been listed on the

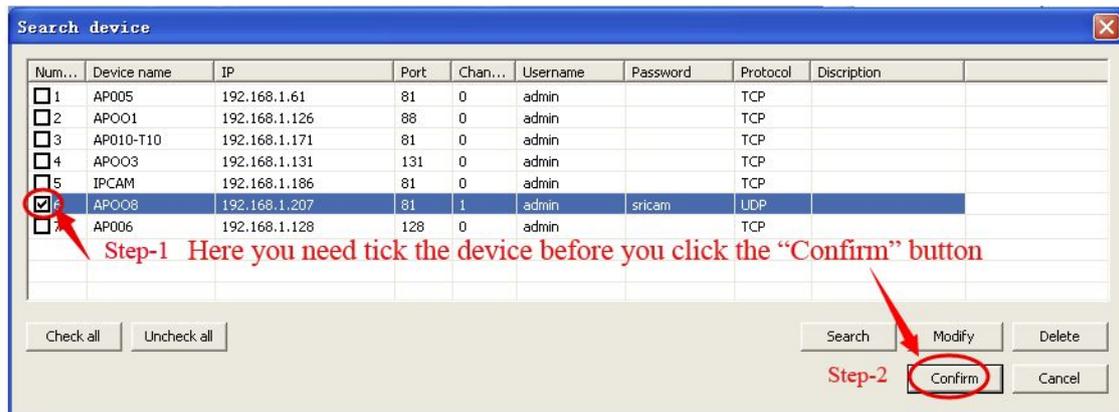


## 2. How to control the camera on the DeviceViewer

2-1: View the camera

Double click the Device name , then the camera video will show on the window of DeviceViewer.

2-2 Control of the Camera.

Steps1: Choose the camera , then click the , will show the PTZ Control interface on the right of the DeviceViewer.

